


CT SHANK (ANSI/ASME B5.50)

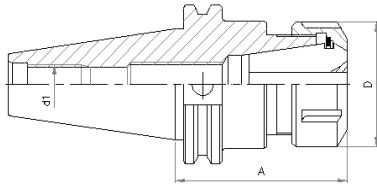

STANDARD LENGTH

DIMENSIONS IN mm

DESIGNATION	SUITABLE FOR COLLET	COLLET CLAMPING CAPACITY (DIA)	A	Thread UNC-2B&d1 TPI	NUT		SPANNER DESIGNATION
					ØD	DESIGNATION	
CT30/ER16/3.0"	ER16	1/16-13/32	3.0	0.500-13	1.10	UM/ER16	GS-25
CT30/ER20/3.0"	ER20	1/16-1/2	3.0	0.500-13	1.34	UM/ER20	GS-30
CT30/ER32/3.0"	ER32	3/32-3/4	3.0	0.500-13	1.97	UM/ER32	E-32
CT40/ER11/3.0"	ER11	1/16-1/4	3.0	0.625-11	0.75	UM/ER11	GS-17
CT40/ER16/2.88"	ER16	1/16-13/32	2.88	0.625-11	1.10	UM/ER16	GS-25
CT40/ER20/4.0"	ER20	1/16-1/2	4.0	0.625-11	1.34	UM/ER20	GS-30
CT40/ER25/4.0"	ER25	1/16-5/8	4.0	0.625-11	1.65	UM/ER25	E-25
CT40/ER32/4.0"	ER32	3/32-3/4	4.0	0.625-11	1.97	UM/ER32	E-32
CT40/ER40/4.0"	ER40	5/32-1"	4.0	0.625-11	2.50	UM/ER40	E-40
CT45/ER16/3.88"	ER16	1/16-13/32	3.88	0.625-11	1.10	UM/ER16	GS-25
CT45/ER20/4"	ER20	1/16-1/2	4.0	0.750-10	1.34	UM/ER20	GS-30
CT45/ER32/4.0"	ER32	3/32-3/4	4.0	0.750-10	1.92	UM/ER32	E-32
CT50/ER16/4.88"	ER16	1/16-13/32	4.88	1.000-8	1.10	UM/ER16	GS-25
CT50/ER20/4.0"	ER20	1/16-1/2	4.0	1.000-8	1.34	UM/ER20	GS-30
CT50/ER25/4.0"	ER25	1/16-5/8	4.0	1.000-8	1.65	UM/ER25	E-25
CT50/ER32/4.0"	ER32	3/32-3/4	4.0	1.000-8	1.97	UM/ER32	E-32
CT50/ER40/4.0"	ER40	5/32-1"	4.0	1.000-8	2.50	UM/ER40	E-40


EXTENDED LENGTH

CT40/ER16/4.88"	ER16	1/16-13/32	4.88	0.625-11	1.10	UM/ER16	GS-25
CT40/ER20/6.0"	ER20	1/16-1/2	6.0	0.625-11	1.34	UM/ER20	GS-30
CT40/ER20/8.0"	ER20	1/16-1/2	8.0	0.625-11	1.34	UM/ER20	GS-30
CT40/ER25/6.0"	ER25	1/16-5/8	6.0	0.625-11	1.65	UM/ER25	E-25
CT40/ER32/6.0"	ER32	3/32-3/4	6.0	0.625-11	1.97	UM/ER32	E-32
CT40/ER40/6.0"	ER40	5/32-1"	6.0	0.625-11	2.50	UM/ER40	E-40
CT50/ER16/6.88"	ER16	1/16-13/32	6.88	1.000-8	1.10	UM/ER16	GS-25
CT50/ER20/6.0"	ER20	1/16-1/2	6.0	1.000-8	1.34	UM/ER20	GS-30
CT50/ER20/8.0"	ER20	1/16-1/2	8.0	1.000-8	1.34	UM/ER20	GS-30
CT50/ER25/6.0"	ER25	1/16-5/8	6.0	1.000-8	1.65	UM/ER25	E-25
CT50/ER32/6.0"	ER32	3/32-3/4	6.0	1.000-8	1.97	UM/ER32	E-32
CT50/ER32/8.0"	ER32	3/32-3/4	8.0	1.000-8	1.97	UM/ER32	E-32
CT50/ER40/6.0"	ER40	5/32-1"	6.0	1.000-8	2.50	UM/ER40	E-40

NOTE:

- DETAILS GIVEN ABOVE ARE APPLICABLE FOR COLLET CHUCKS WITH BT SHANK ONLY
- COLLET CHUCKS WITH OTHER TYPES OF SHANK LIKE SK, TC, CT & ISO, ETC. ARE ALSO OFFERED.
- COLLET CHUCKS ARE SUPPLIED WITH NUTS.
- **RD** COLLETS ARE SAME AS **ER** COLLETS CONFORMING TO DIN 6499 FORM B
- OPTIONALLY COLLET CHUCKS CAN BE SUPPLIED IN BALANCED CONDITION FOR HIGH SPEED APPLICATIONS.
- **PLACE SEPARATE ORDER FOR SPANNERS. (Refer page No. 59)**

ORDERING INSTRUCTION



COLLET CHUCKS

