


**BT SHANK**

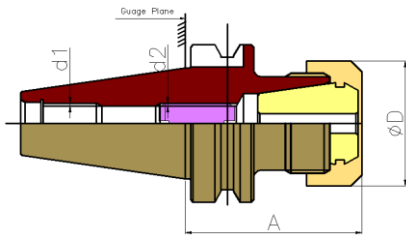

DIMENSIONS IN mm

**STANDARD LENGTH**

DESIGNATION	SUITABLE FOR COLLET	COLLET CLAMPING CAPACITY (DIA)	A	ød1	STOPPER SCREW ød2	NUT		SPANNER DESIGNATION
						ØD	DESIGNATION	
BT30/ER16/70	ER16	1 - 10	70	M12	M8	28	UM/ER16	GS-25
BT30/ER16M/70	ER16	1 - 10	70	M12	M8	22	UM/ER16M	E-16M
BT30/ER20/70	ER20	2 - 13	70	M12	M10	34	UM/ER20	GS-30
BT30/ER32/70	ER32	3 - 20	70	M12	M8	50	UM/ER32	E-32
BT40/ER16/70	ER16	1 - 10	70	M16	M10	28	UM/ER16	GS-25
BT40/ER20/70	ER20	2 - 13	70	M16	M12	34	UM/ER20	GS-30
BT40/ER25/70	ER25	2 - 16	70	M16	M16	42	UM/ER25	E-25
BT40/ER32/70	ER32	3 - 20	70	M16	M16	50	UM/ER32	E-32
BT40/ER40/80	ER40	4 - 26	80	M16	M12	63	UM/ER40	E-40
BT40/ERO25/70	ERO25	2 - 16	70	M16	M16	43	UM/ERO25	E-25
BT40/ERO35/80	ERO35	2 - 25	80	M16	M16	60	UM/ERO35	E-40
BT40/ERO44/100	ERO44	4 - 32	100	M16	M16	72	UM/ERO44	E-50
BT40/ERG100/80	ERG100	2 - 25	80	M16	M16	60	UM/ERG100	E-40
BT50/ER32/100	ER32	3 - 20	100	M24	M16	50	UM/ER32	E-32
BT40/ER40/80	ER40	4 - 26	80	M24	M16	63	UM/ER40	E-40
BT40/ER50/100	ER50	12 - 34	100	M24	M16	78	UM/ER50	E-50
BT40/ERO35/90	ERO35	2 - 25	90	M24	M16	43	UM/ERO35	E-40
BT40/ERO44/100	ERO44	4 - 32	100	M24	M16	72	UM/ERO44	E-50

**EXTENDED LENGTH**

BT30/ER16M/120	ER16	1 - 10	120	M12	M8	22	UM/ER16M	E-16M
BT40/ER16M/125	ER16	1 - 10	125	M16	M8	22	UM/ER16M	E-16M
BT40/ER20M/135	ER20	2 - 13	135	M16	M10	28	UM/ER20M	E-20M
BT40/ER25M/150	ER25	2 - 16	150	M16	M12	35	UM/ER25M	E-25M
BT40/ER16/105	ER16	1 - 10	105	M16	M8	28	UM/ER16	GS-25
BT40/ER20/105	ER20	2 - 13	105	M16	M10	34	UM/ER20	GS-30
BT40/ER25/105	ER25	2 - 16	105	M16	M12	42	UM/ER25	E-25
BT40/ER32/105	ER32	3 - 20	105	M16	M16	50	UM/ER32	E-32
BT40/ER40/105	ER40	4 - 26	105	M16	M16	63	UM/ER40	E-40
BT50/ER16M/135	ER16	1 - 10	135	M24	M8	22	UM/ER16M	E-16M
BT50/ER20M/135	ER20	2 - 13	135	M24	M10	28	UM/ER20M	E-20M
BT50/ER25M/135	ER25	2 - 16	135	M24	M12	35	UM/ER25M	E-25M

**NOTE:**

- DETAILS GIVEN ABOVE ARE APPLICABLE FOR COLLET CHUCKS WITH BT SHANK ONLY
- COLLET CHUCKS WITH OTHER TYPES OF SHANK LIKE SK, TC, CT & ISO, ETC. ARE ALSO OFFERED.
- COLLET CHUCKS ARE SUPPLIED WITH NUTS.
- **RD** COLLETS ARE SAME AS **ER** COLLETS CONFORMING TO DIN 6499 FORM B
- OPTIONALLY COLLET CHUCKS CAN BE SUPPLIED IN BALANCED CONDITION FOR HIGH SPEED APPLICATIONS.
- **PLACE SEPARATE ORDER FOR SPANNERS. (Refer page No. 59)**

**ORDERING INSTRUCTION**

